




APPLY BASE COAT, EMBED 8" (10cm) WIDE ALSAN PolyFleece AND COVER WITH ADDITIONAL MATERIAL. TURN BASE COAT AND PolyFleece DOWN FACE OF BUILDING AND ONTO ROOF WITHOUT WRINKLES OR FOLDS. AFTER SET-UP, APPLY ADDITIONAL LAYER OF BASE COAT PRIOR TO EMBEDDING 2nd LAYER OF PolyFleece. TOTAL WET MIL THICKNESS-30 MILS EACH COAT. INSURE PolyFleece IS COMPLETELY EMBEDDED, COVERED AND WATERTIGHT.

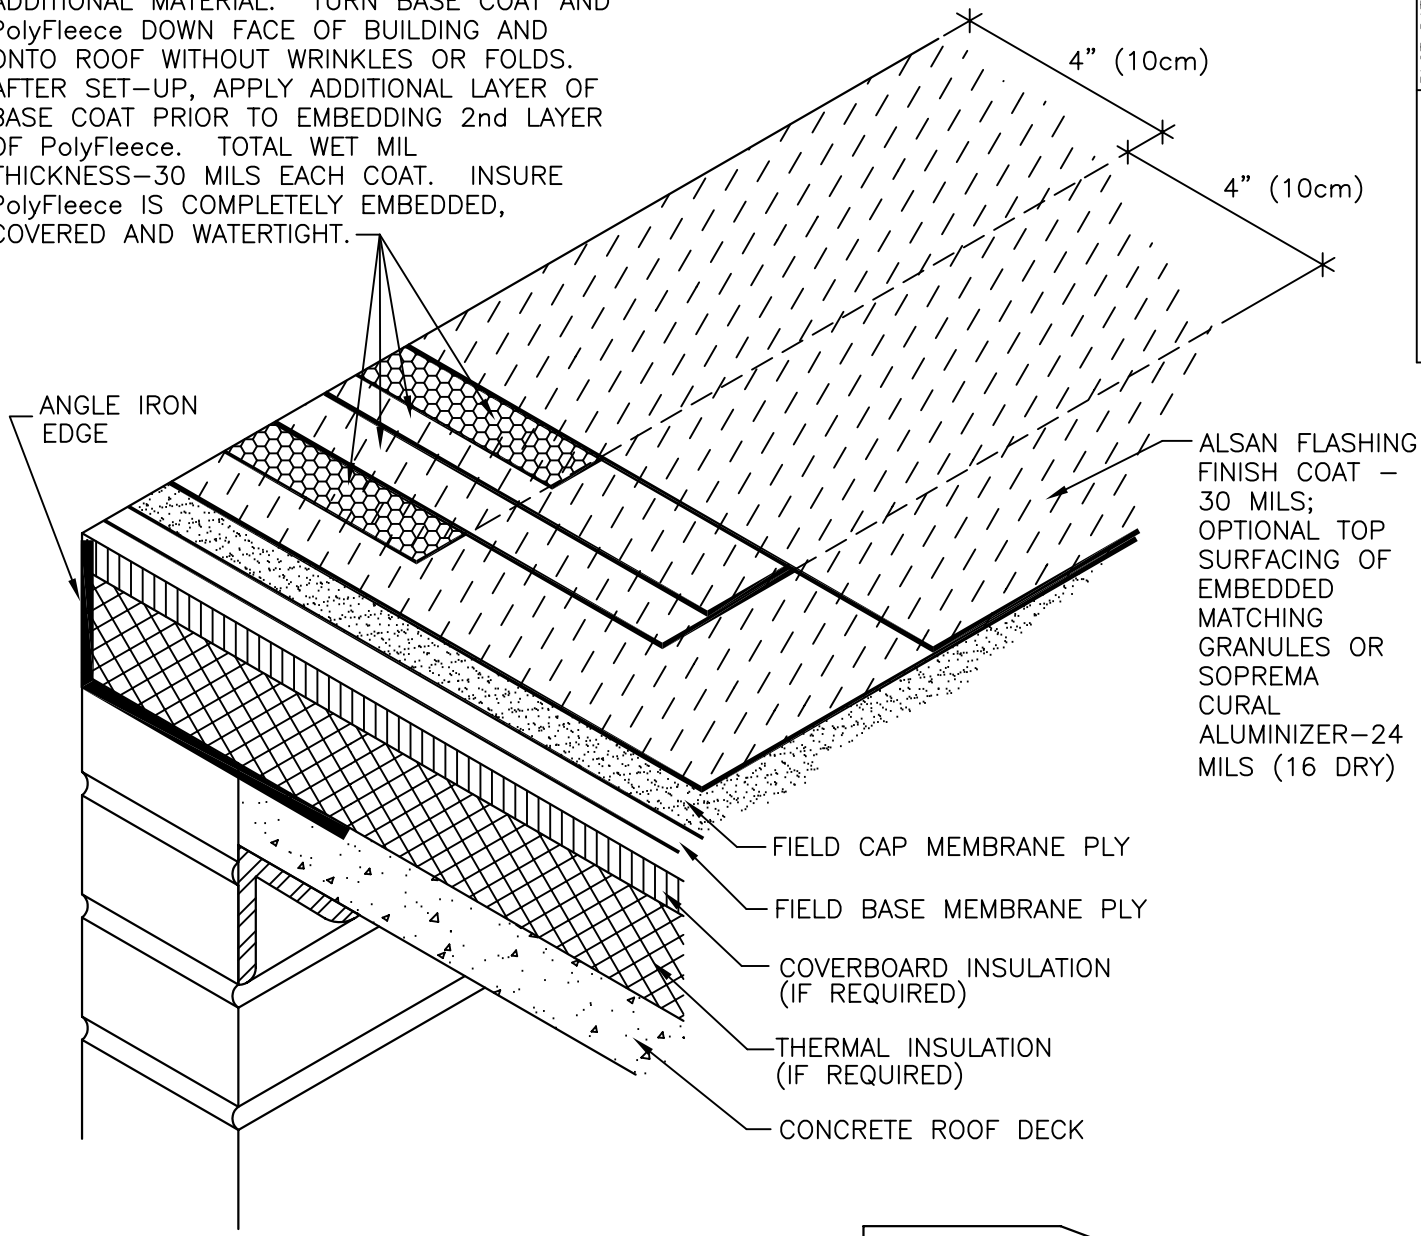

NOTES:

1. DETAIL TO BE USED IN CONJUNCTION WITH SOPREMA GENERAL REQUIREMENTS, APPROVED DETAILS AND ALSAN FLASHING (A.F.) APPLICATION AND COVERAGE DIRECTIONS.
2. CURAL 24 WET MIL COVERAGE RATE (DRY 16 MILS) IS 1.5 GALS/100FT² ALSAN FLASHING 30 WET MILS COVERAGE RATE (22 DRY MILS) IS 1.87 GALS/100FT² ALL COVERAGE RATES ARE APPROXIMATE, THEORETICAL AND DO NOT ACCOUNT FOR WASTE, SPILLAGE, IRREGULAR SURFACES AND APPLICATION TECHNIQUES THAT CAN ALSO VARY WITH INSTALLER. RATES MAY ALSO VARY DEPENDING UPON MATERIAL AND AMBIENT TEMPERATURE(S), SURFACE FINISH AND POROSITY OF THE SUBSTRATE.

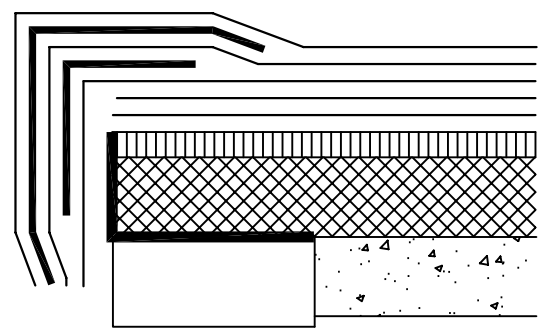

		310 QUADRAL DRIVE WADSWORTH, OHIO 44281 (330) 334-0066			
		TITLE ALSAN FLASHING ANGLE IRON EDGE			
SCALE	NONE	DWN DMT	CHK PR	APPROVAL DATE	10/15/04
DRAWING NUMBER				AFE-004	
					REV 0

** USAGE OF THIS DRAWING IS GOVERNED BY THE TERMS OF SERVICE FOR SOPREMA DETAIL. PLEASE CONSULT THESE TERMS OF SERVICE PRIOR TO UTILIZING THIS DRAWING.