


APPLY ALSAN FLASHING BASE COAT WITH 8" (10cm) WIDE ALSAN POLYFLEECE EMBEDDED INTO AND COVERED WITH BASE COAT WITHOUT WRINKLES OR FOLDS. TOTAL WET MIL THICKNESS—30MIL AND APPROX. 22 DRY MILS (TYP)

SOPREMA APPROVED PRIMER

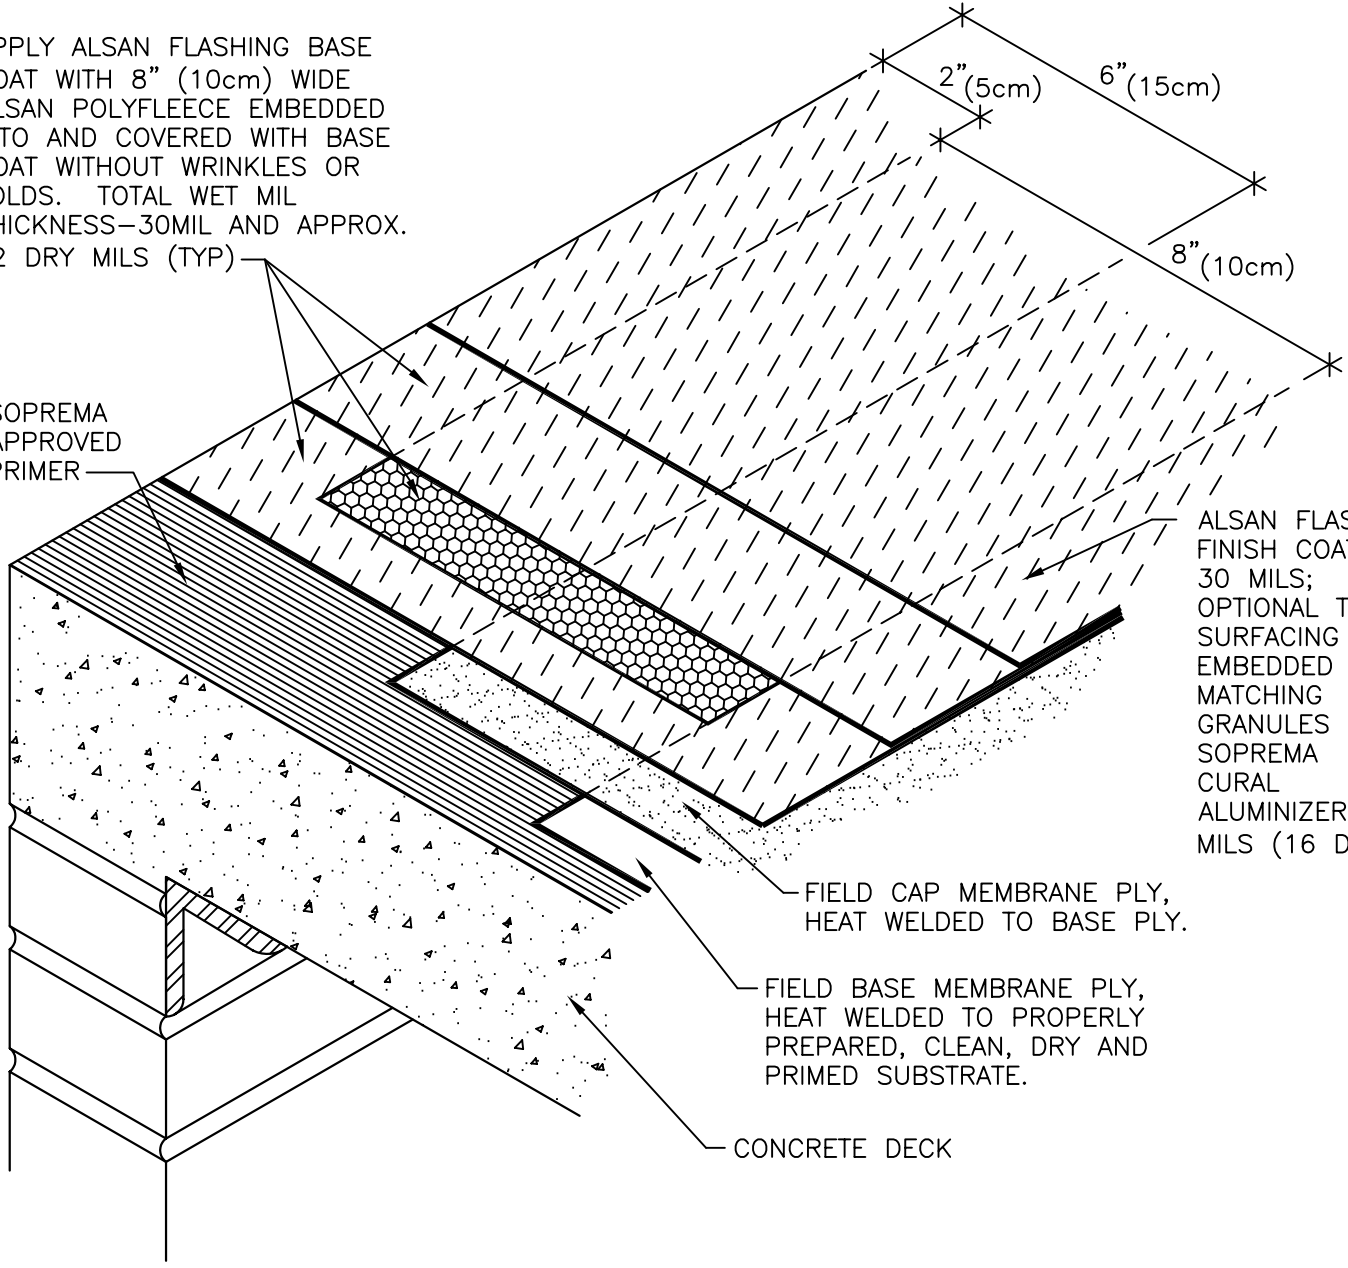

ALSAN FLASHING FINISH COAT — 30 MILS; OPTIONAL TOP SURFACING OF EMBEDDED MATCHING GRANULES OR SOPREMA CURAL ALUMINIZER—24 MILS (16 DRY)


FIELD CAP MEMBRANE PLY, HEAT WELDED TO BASE PLY.

FIELD BASE MEMBRANE PLY, HEAT WELDED TO PROPERLY PREPARED, CLEAN, DRY AND PRIMED SUBSTRATE.

CONCRETE DECK

NOTES:

1. DETAIL TO BE USED IN CONJUNCTION WITH SOPREMA GENERAL REQUIREMENTS, APPROVED DETAILS AND ALSAN FLASHING (A.F.) APPLICATION AND COVERAGE DIRECTIONS.
2. CURAL 24 WET MIL COVERAGE RATE (DRY 16 MILS) IS 1.5 GALS/100FT² ALSAN FLASHING 30 WET MILS COVERAGE RATE (22 DRY MILS) IS 1.87 GALS/100FT² ALL COVERAGE RATES ARE APPROXIMATE, THEORETICAL AND DO NOT ACCOUNT FOR WASTE, SPILLAGE, IRREGULAR SURFACES AND APPLICATION TECHNIQUES THAT CAN ALSO VARY WITH INSTALLER. RATES MAY ALSO VARY DEPENDING UPON MATERIAL AND AMBIENT TEMPERATURE(S), SURFACE FINISH AND POROSITY OF THE SUBSTRATE.

		310 QUADRAL DRIVE	
		WADSWORTH, OHIO 44281 (330) 334-0066	
TITLE ALSAN FLASHING @ BUILDING EDGE			
SCALE NONE	DWN DMT	CHK PR	APPROVAL DATE 10/15/04
DRAWING NUMBER AFE-005			REV 0

** USAGE OF THIS DRAWING IS GOVERNED BY THE TERMS OF SERVICE FOR SOPREMA DETAIL. PLEASE CONSULT THESE TERMS OF SERVICE PRIOR TO UTILIZING THIS DRAWING.