


COLSTIX™ CAP  
MEMBRANE PLY  
ADHERED TO FIELD  
BASE MEMBRANE PLY

SOPREMA APPROVED  
SEAM SEALANT  
APPLIED TO FINISHED  
EDGES OF FIELD BASE  
MEMBRANE PLY (TYP.)  
SEE NOTE 2

COLSTIX™ FIELD BASE  
MEMBRANE PLY  
SELF-ADHERED TO  
ACCEPTABLE SUBSTRATE


SOPREMA APPROVED  
SA PRIMER APPLIED  
TO TOPSIDE OF BASE  
PLY PRIOR TO SA  
CAP SHEET BEING  
INSTALLED.

THERMAL INSULATION  
(IF REQUIRED)  
FOLLOWED BY  
APPROVED RIGID  
BOARD, SECURED  
AS SPECIFIED (TYP.)

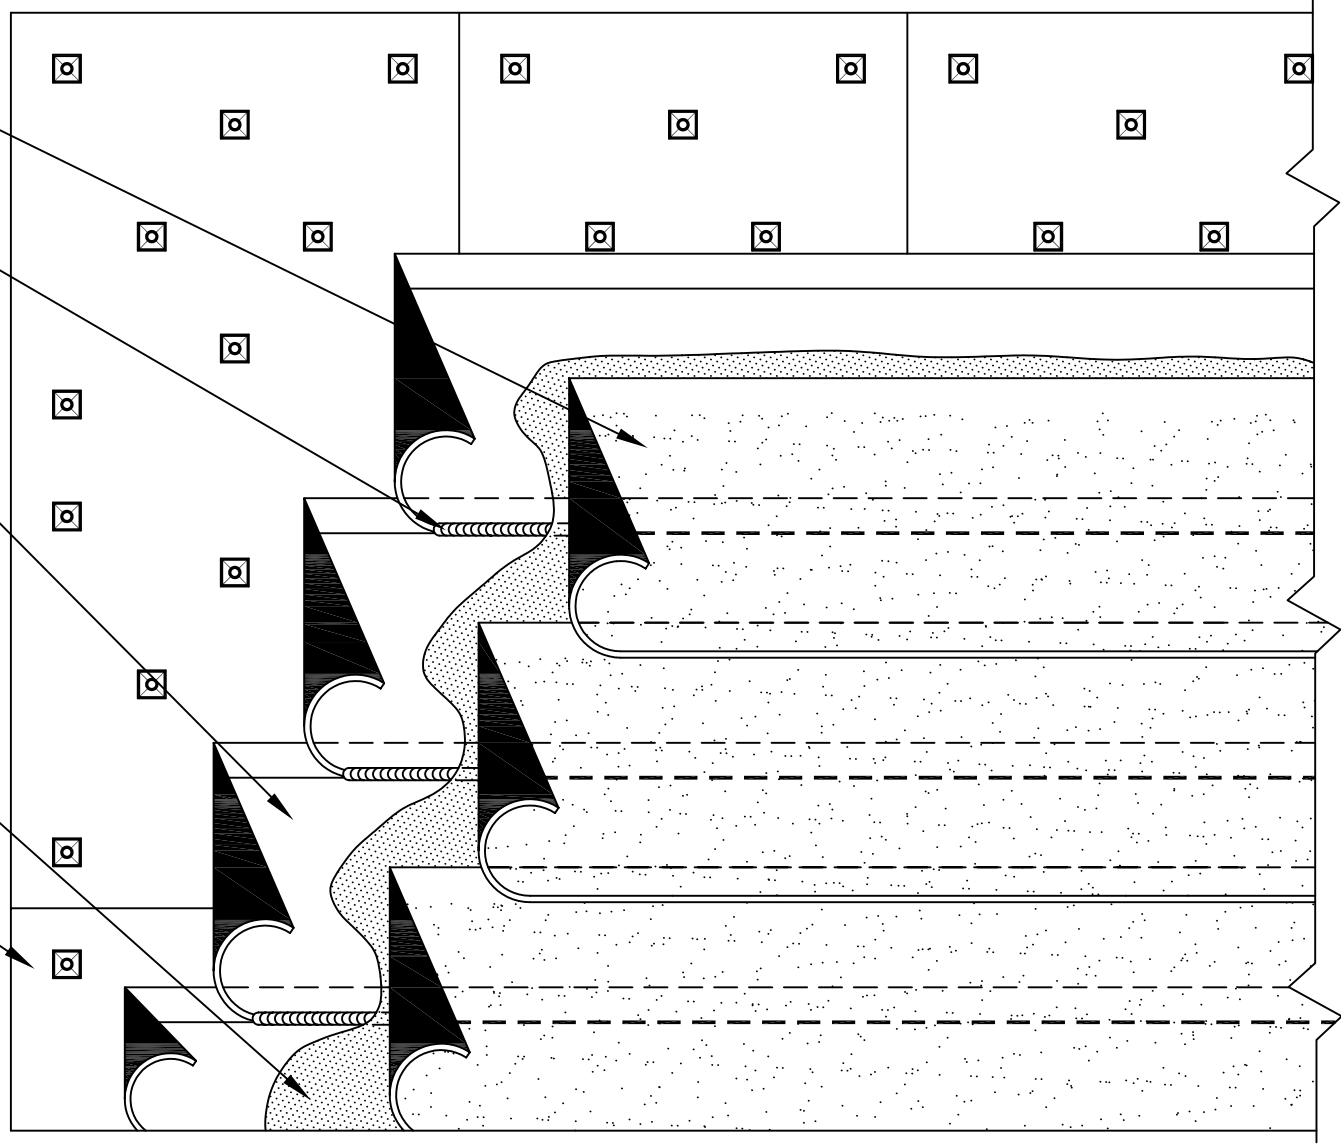

NOTES:

1. DETAIL TO BE USED IN CONJUNCTION WITH SOPREMA GENERAL REQUIREMENTS, COLSTIX PDS AND APPROVED DETAILS.
2. SEE DETAIL CXM-001 NOTES 2 & 3 FOR END LAP, (T) JOINTS AND FLASHING TIE-IN WATERTIGHT SEAL.
3. MEMBRANE INSTALLATION MUST NOT PREVENT VENTILATION OF EXISTING STRUCTURE.
4. WHEN PHASE CONSTRUCTING, BASE MEMBRANE PLY MUST BE CLEAN, DRY AND FREE OF ANY LATENT MOISTURE PRIOR TO PRIMER AND CAP SHEET APPLICATION.
5. COLSTIX™ SERIES FIELD CAP MEMBRANE PLY HAS A SELF-ADHESIVE UNDERSIDE WITH THE RELEASE FILM REMOVED PRIOR TO ADHERING THE CAP SHEET TO THE PRIMED COLSTIX™ SERIES FIELD BASE MEMBRANE PLY. THE FIELD BASE MEMBRANE PLY HAS EITHER A SELF-ADHESIVE OR PARTIAL SELF-ADHESIVE RIBBON UNDERSIDE WITH THE RELEASE FILM REMOVED PRIOR TO ADHERING THE BASE PLY TO AN ACCEPTABLE SUBSTRATE OR PRIMED SUBSTRATE. SEE CXM DETAILS.

		310 QUADRAL DRIVE WADSWORTH, OHIO 44281 (330) 334-0066	
TITLE COLSTIX™ SA w/ Rigid Board			
SCALE NONE	DWN DMT	CHK PR	APPROVAL DATE 10/15/04
DRAWING NUMBER CXM-007			REV 0

\*\* USAGE OF THIS DRAWING IS GOVERNED BY THE TERMS OF SERVICE FOR SOPREMA DETAIL. PLEASE CONSULT THESE TERMS OF SERVICE PRIOR TO UTILIZING THIS DRAWING.