

ALSAN LIQUID MEMBRANE FINGER FLASHING  
EXTENDED 4" (10cm) MIN. INTO PREPARED  
AND CLEANED DRAIN BOWL.


ALSAN LIQUID MEMBRANE TARGET FLASHING  
EXTEND FROM EDGE OF DRAIN BOWL ONTO  
PREPARED & PRIMED SUBSTRATE.

ALSAN FULLY REINFORCED LIQUID MEMBRANE  
(SEE NOTE #2).

PREPARE, LEVEL & PATCH SUBSTRATE W/  
ACCEPTABLE PATCHING MORTAR PRIOR TO  
APPLICATION OF SOPREMA ALSAN LIQUID  
APPLIED PRIMER AND MEMBRANE (TYP).

GEOTEXTILE FILTER FABRIC EXTEND  
12" MIN. ONTO HORIZONTAL PLANE.

MESH SCREEN & DRAIN STRAINER

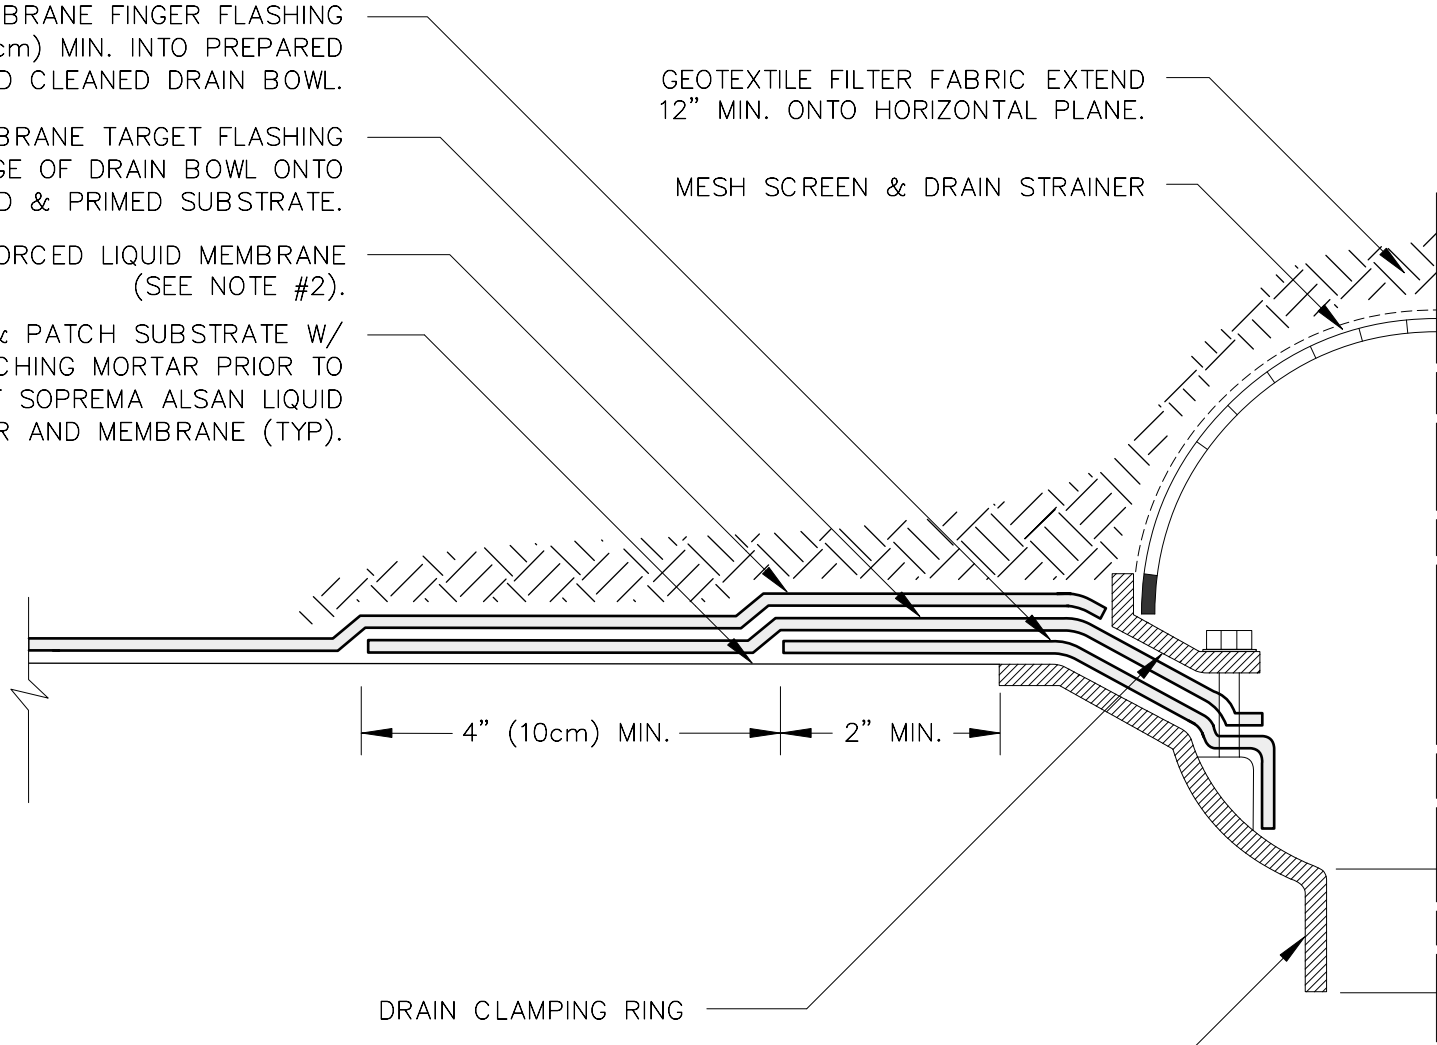

4" (10cm) MIN.      2" MIN.

DRAIN CLAMPING RING

ACCEPTABLE PLANTER DRAIN ASSEMBLY PREPARE & PRIME DRAIN  
BOWL AS REQ'D FOR ALSAN LIQUID MEMBRANE APPLICATION.

NOTES:

1. DETAIL TO BE USED IN CONJUNCTION WITH SOPREMA GENERAL REQUIREMENTS, APPLICATION METHODS AND APPROVED DETAILS.
2. A FULLY REINFORCED LIQUID MEMBRANE SYSTEM IS DEFINED AS AN ASSEMBLY CONSISTING OF TWO LIQUID RESIN APPLICATIONS & FABRIC REINFORCEMENT INSTALLED BETWEEN THE RESIN LAYERS. REFER TO DETAIL A-1 FOR ADDITIONAL INFORMATION.

		310 QUADRAL DRIVE WADSWORTH, OHIO 44281 (330) 334-0066	
		TITLE: PLANTER DRAIN FLASHING	
SCALE: NONE	DWN: PBF	CHK: BS	APPROVAL DATE: 8/14/09
DRAWING NUMBER: D-6			REV: 0

\*\* USAGE OF THIS DRAWING IS GOVERNED BY THE TERMS OF SERVICE FOR SOPREMA DETAIL. PLEASE CONSULT THESE TERMS OF SERVICE PRIOR TO UTILIZING THIS DRAWING.