


ALSAN FLASHING RECOVERY SYSTEM

LIQUID APPLIED COATING SYSTEM

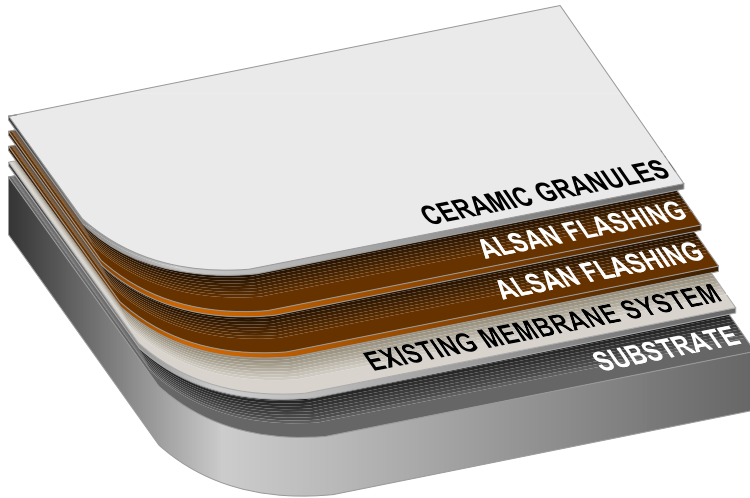

PRODUCT DETAILS

ALSAN FLASHING

Single component bitumen-polyurethane waterproofing resin

Please refer to applicable product data sheets for additional information.

SUBSTRATE PREPARATION

Refer to substrate preparation and priming schedule. Remove existing paint and finishes etc. by mechanical means.

Ensure that the prepared surface is clean, dry and free from dust, laitance, grease, oil and any other contaminants.

Acceptance of the substrate and/or existing surface is the sole decision of the owner or appointed representative.

PRIMING

Not applicable.

FIELD AND FLASHING

Apply an even layer of ALSAN FLASHING (2.0-2.5 gal/100 ft² min.) with a 1/4" notched squeegee and leveled with a lambswool roller.

Can be walked upon/next coat applied after approx. 12 hours.

Apply another even layer of ALSAN FLASHING (2.0-2.5 gal/100 ft² min.)

Broadcast to excess ceramic granules into the finish coat before finish coat prior to final coat cure.

Remove excess granules after approx. 12 hours.

For vertical flashing applications, ALSAN FLASHING is applied at identical flashing rates as in the field. ALSAN POLYFLEECE is utilized at all angle changes for proper reinforcement. Refer to applicable details for additional information.

TRAFFICABLE SURFACING

Not applicable.

COMPLETION

Upon completion of new installation (including all associated work), institute appropriate procedures for surveillance and protection of finished work during remainder of construction period. Protect all areas where coating has recently been installed. Notify the Owner and the Manufacturer when finished. Coordinate final inspection by Manufacturer. Complete all repairs or requests promptly. Comply with all paperwork and payment requirements necessary to acquire the specified warranty.

SOPREMA