


ALSAN PEDESTRIAN SYSTEM

ALSAN TRAFIK HP 500 SYSTEM

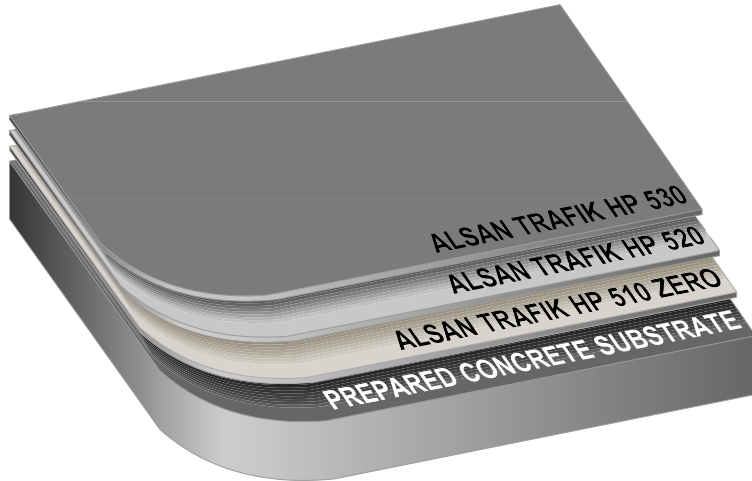

PRODUCT DETAILS

ALSAN TRAFIK HP 510 ZERO

Primer for improving substrate adhesion

ALSAN TRAFIK HP 520

Single component polyurethane waterproofing resin

ALSAN TRAFIK HP 530

Single component polyurethane trafficking surface

Please refer to applicable product data sheets for additional information.

SUBSTRATE PREPARATION

Refer to substrate preparation and priming schedule. Remove existing paint and finishes etc. by mechanical means.

Ensure that the prepared surface is clean, dry and free from dust, laitance, grease, oil and any other contaminants.

Concrete substrate should have a maximum moisture content of 1.5 kg/100m²/24h (ASTM F1869) and internal content of 75 % RH (ASTM F2170).

Acceptance of the substrate is the sole decision of the owner or appointed representative.

PRIMING

ALSAN TRAFIK HP 510 ZERO:

Apply with a lambswool roller (0.5 gal/100 ft² min.)

Can be walked upon/next coat applied after approx. three hours.

WATERPROOFING APPLICATION

Apply an even layer of TRAFIK HP 520 (1.7 gal/100 ft² min.) with a 1/4" notched squeegee and leveled with a lambswool roller.

Can be walked upon/next coat applied after approx. 12 hours.

TRAFFICABLE SURFACING

Apply TRAFIK HP 530 (1.3 gal/100 ft² min.) with a 1/4" notched squeegee.

Aggregate silica sand is broadcast into the wear coat in order to obtain a non-skid finish. TRAFIK HP 530 is then leveled with a lambswool roller.

Can be walked upon/next coat applied after approx. 12 hours.

COMPLETION

Upon completion of new installation (including all associated work), institute appropriate procedures for surveillance and protection of finished work during remainder of construction period. Protect all areas where coating has recently been installed. Notify the Owner and the Manufacturer when finished. Coordinate final inspection by Manufacturer. Complete all repairs or requests promptly. Comply with all paperwork and payment requirements necessary to acquire the specified warranty.

SOPREMA