




FOR ASPHALT APPLIED MEMBRANE, TAKE CAUTION WITH ASPHALT GETTING ONTO THE MEMBRANE

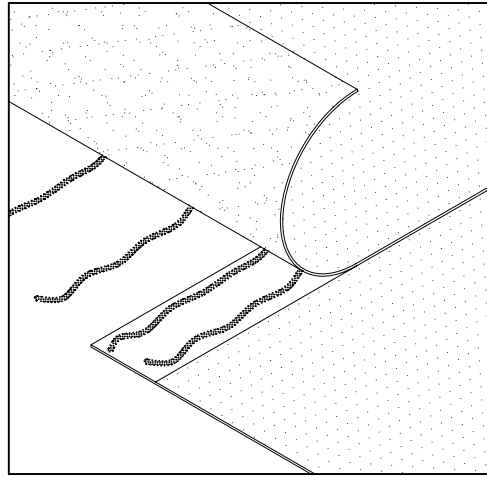

FOR RIBBON APPLIED ADHESIVES, APPLY ADHESIVE RIBBONS ONTO THE LAP

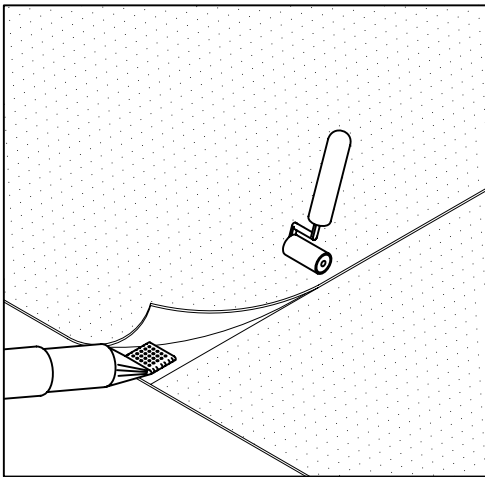

FOR ANY SYSTEM, THE SEAMS MAY BE HEAT WELDED. THIS WILL OFFER THE CLEANEST LAP

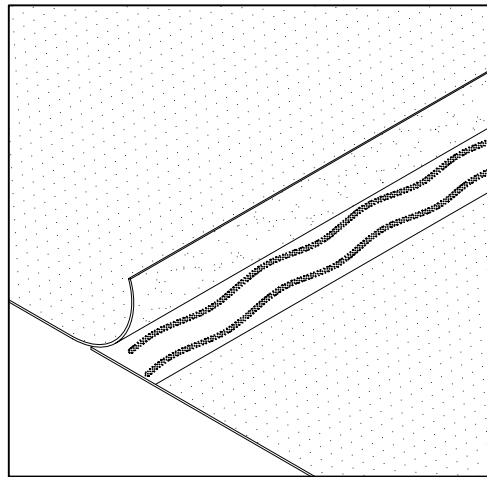

FOR ANY SYSTEM, ADHESIVE RIBBONS MAY BE APPLIED ONTO THE LAP TO CREATE A WATER TIGHT SEAM

NOTES:

1. DETAIL TO BE USE IN CONJUNCTION WITH SOPREMA GENERAL REQUIREMENTS, APPLICATION METHODS AND APPROVED DETAILS.
2. SOPREMA ADHESIVES, CEMENTS, MASTICS, PRIMERS AND SEALANTS ARE REQUIRED WHERE INDICATED.
3. WHEN A PROJECT SPECIFICATION REQUIRES SOPREMA TO WARRANT SHOP FORMED METAL(S), ROOFING CONTRACTOR MUST SUBMIT METAL SPECIFICATION AND ALL PROPOSED METAL DETAILS TO THE SOPREMA CORPORATE TECHNICAL DEPARTMENT FOR REVIEW/APPROVAL PRIOR TO BIDDING AND/OR INSTALLATION.



310 QUADRAL DRIVE
WADSWORTH, OHIO 44281
(330) 334-0066

TITLE MEMBRANE LAP TREATMENT			
SCALE	DWN KD	CHK BS	APPROVAL DATE 09.19.09
DRAWING NUMBER TVALU-005			REV 1

** USAGE OF THIS DRAWING IS GOVERNED BY THE TERMS OF SERVICE FOR SOPREMA DETAIL. PLEASE CONSULT THESE TERMS OF SERVICE PRIOR TO UTILIZING THIS DRAWING.