


ALSAN METAL ROOF RESTORATION

MBSP SPRAYABLE MEMBRANE SYSTEM

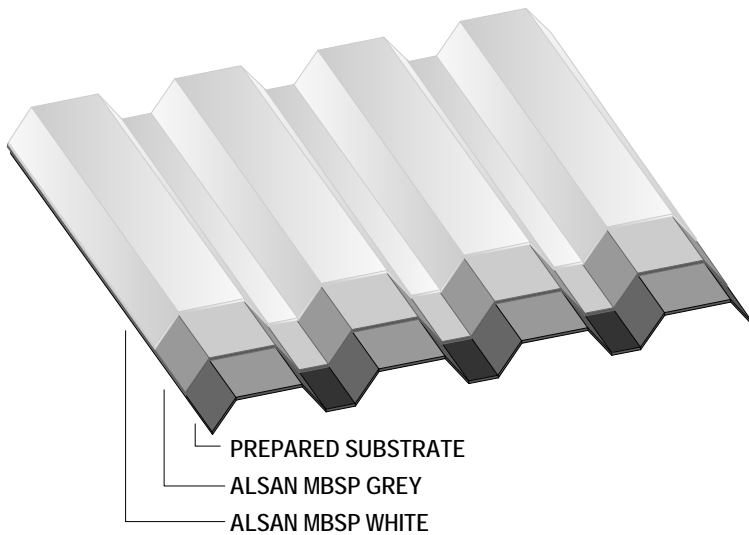

PRODUCT DETAILS

ALSAN MBSP

Sprayable SEBS liquid waterproofing

ALSAN MBSP MASTIC

Mastic grade SEBS liquid waterproofing

Please refer to applicable product data sheets for additional information.

SUBSTRATE PREPARATION

Refer to substrate preparation and priming schedule.

Generally:

Remove existing paint and finishes etc. by grinding.

Ensure that the prepared surface is clean, dry and free from dust, laitance, grease, oil and any other contaminants.

Power wash with minimum 2500 psi spray rig.

Replace any material that is rusted through.

Tighten or replace fasteners as needed.

Acceptance of the substrate is the sole decision of the owner or appointed representative.

PRIMING

Not applicable.

FIELD AND FLASHING

Apply ALSAN MBSP MASTIC to all reseated fastener heads and with reinforcement at questionable seams.

Apply an even layer of ALSAN MBSP GREY (1.5 gal/100 ft² min.) with a spray rig or lambswool roller.

Can be walked upon/next coat applied after approx. 1 hour.

Apply ALSAN MBSP WHITE (1.5 gal/100 ft² min.) with a spray rig or lambswool roller.

For areas with translucent or transparent panels or glass, mask these areas during ALSAN MBSP GREY AND ALSAN MBSP WHITE applications. Apply two applications of ALSAN MBSP CLEAR (1.5 GAL/100 ft² min.) with a spray rig or roller. Overlap previously applied ALSAN MBSP WHITE by at least two inches to ensure proper tie-in.

Can be walked upon after approx. 1 hour.

TRAFFICABLE SURFACING

Not applicable.

COMPLETION

Upon completion of new installation (including all associated work), institute appropriate procedures for surveillance and protection of finished work during remainder of construction period. Protect all areas where coating has recently been installed. Notify the Owner and the Manufacturer when finished. Coordinate final inspection by Manufacturer. Complete all repairs or requests promptly. Comply with all paperwork and payment requirements necessary to acquire the specified warranty.

SOPREMA